

- Using the Double Junction Thermocouples to improve accuracy
- Electrical Simulation using Double Junction Thermocouples
- Thermocouple Referencing System

PART 2: Double Junction Thermocouple

What is it and how can it be used?

We have seen in Part 1, the different ways in which Cold Junction Compensation can be provided when making measurements with thermocouples.

It was explained how the use of a simple calibrated Double Junction Thermocouple (DJT) could offer a superior accuracy Reference Junction (RJ) (or Cold Junction, CJ).

The following sections show the versatility of the DJT.


An accurate Reference Junction (RJ) for a test thermocouple

When calibrating thermocouples there is an obvious need to provide some form of referencing in order to correctly and accurately measure the output of the thermocouple.

The easiest option as described in Part 1 is to use a Temperature Indicator with internal Cold Junction Compensation (CJC), however this method is not ideal.

RJ sensors used in these Temperature Indicators are low quality and as such are prone to error during calibration. Any error here directly correlates to an error in the measured output of the thermocouple.

A more accurate solution is shown below.

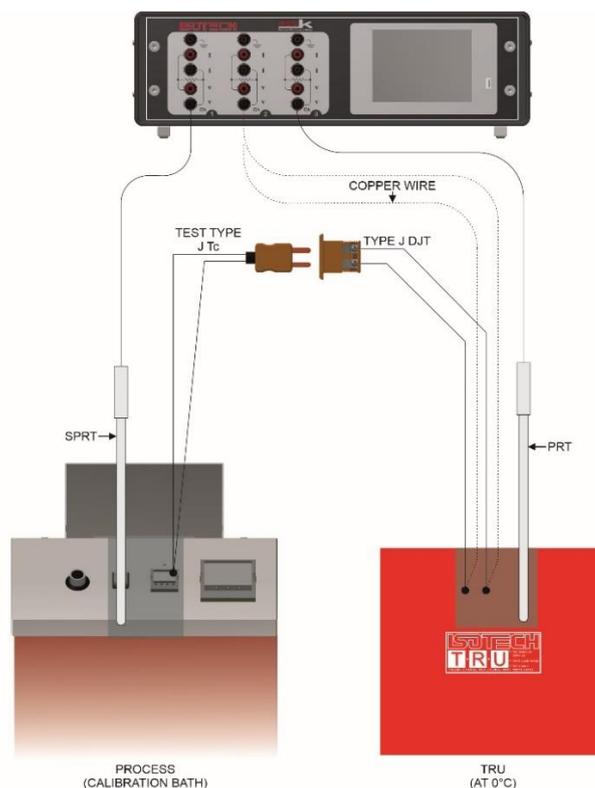

The example above shows a calibrated type J DJT fitted with a thermocouple socket. The type J thermocouple under test is connected to the DJT via a thermocouple plug and the output is measured on the copper wires of the DJT by a microK (reference voltmeter or instrument whose internal CJC can be switched off).

The output of the test thermocouple can simply be corrected, for the error in the DJT.

The corrected output voltage of the test thermocouple can be described as;

$$V_{co} = V_m - V_r$$

Where;

V_{co} = Corrected output voltage of the test thermocouple

V_m = Measured output voltage

V_r = DJT error at 20 °C from its calibration

Example;

The temperature in a calibration bath as measured by a Standard Platinum Resistance Thermometer (SPRT) = 100.23 °C

The temperature in the laboratory (where the test thermocouple is connected to the DJT) = 20.00 °C

The measured output voltage = 5290 μ V

The DJT error at 20 °C from its calibration = +1 μ V

$$V_{co} = 5290 \mu\text{V} - 1 \mu\text{V}$$

$$V_{co} = 5289 \mu\text{V}$$

From this the error of the test thermocouple can be calculated.

Calibration Temperature (°C)	Equivalent type J Tc μ V (using IEC 60584)	Measured output voltage of test type J TC (μ V)	Type J DJT error at 20°C (μ V)	Corrected output voltage of test type J Tc (μ V)	Error of test type J Tc (μ V)	Error of test type J Tc in °C (using IEC 60584)
100.23	5281	5290	1	5289	8	0.15


Electrical Simulation of Thermocouple Measuring Instruments using a DJT

Some thermocouple measuring instruments have the ability to switch the internal CJC on or off. This choice is dependent on whether the thermocouple being measured is fitted with its own RJ or not.

Invariably these instruments require some form of traceable calibration in order to quantify any measurement error.

With the CJC switched off the electrical calibration is simple.

Whitepaper

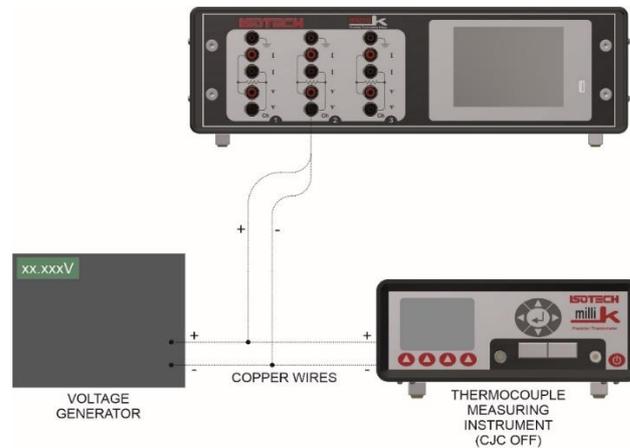

The voltage generator is set to output a voltage that is equivalent to a specific temperature for a particular thermocouple type. The international standard IEC 60584 can be used for these values.

The output voltage from the generator can be accurately set by using a microK (or reference voltmeter) connected across its outputs.

With the measuring instrument under test set to the same thermocouple type and with its internal CJC switched OFF it will indicate the voltage and/or converted temperature that has been applied.

Test Temperature (°C)	Equivalent Type J μ V set on Voltage Generator (IEC 60584)	Test Instrument Indicated Voltage (μ V)	Test Instrument Voltage error (μ V)	Test Instrument Indicated Temperature (°C)	Test Instrument Temperature error (°C)
100.00	5269	5270	1	100.02	0.02

This method of calibration establishes the voltage and/or temperature error of the instrument.

However, the error associated with the internal CJC sensor of the instrument is still unknown.

This will require a separate calibration.


For this calibration some thermocouple measuring instruments will allow the internal CJC sensor to be automatically calibrated by the application of a known temperature on its inputs, some instruments may just indicate the live internal CJC sensor temperature, whilst other instruments may not offer either of these.

Regardless of the functionality of the instrument under test a DJT can be used to simulate a known temperature on the inputs. This will either allow the automatic calibration to take place or the indicated temperature can be compared to the simulated input temperature to establish the internal CJC error.

Throughout this calibration the internal CJC of the measuring instrument under test should be switched ON.

The required simulated temperature for most instruments employing automatic CJC calibration is 20.00 °C as this is a good approximation of the CJC temperature of an instrument during use. This temperature is also suitable for calibrating the internal CJC of more basic instruments.

The test set up is similar to that above but with the addition of a calibrated DJT.

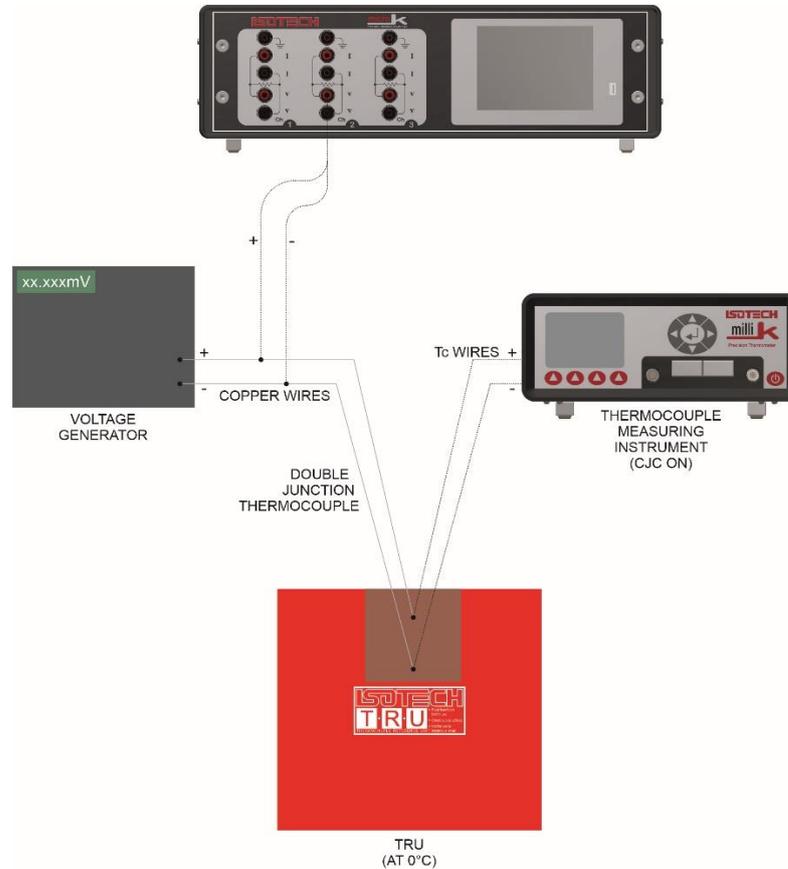

The RJ of the DJT is maintained at 0°C in a Thermocouple Referencing Unit (TRU) and the copper wires of the DJT are connected to the voltage generator.

The output from the voltage generator can be accurately set using a microK (or reference voltmeter), to a voltage equivalent to 20.00 °C for a particular thermocouple type taking into account the calibration error of the DJT.

The required voltage generator output to take into account the DJT error can be described as;

$$V_{go} = V_t + V_r$$

Where;

v_{go} = Voltage generator set output

v_t = IEC 60584 test temperature equivalent voltage

v_r = DJT error at 20 °C from its calibration

For this sort of calibration, it is best to use a DJT type which has a large Seebeck coefficient such as type J or type E, this gives more sensitivity to the calibration.

Example set of results.

Test Temperature (°C)	Equivalent Type J μ V (IEC 60584)	Type J DJT error at 20 °C (μ V)	Set output of Voltage Generator (Corrected for DJT error) (μ V)	Indicated Temperature (°C)	Internal CJC sensor Error (°C)
20.00	1019	1	1020	20.10	0.10

The error in the table above is dominated by the internal CJC error but it also includes the measurement capability of the instrument itself.

The advantage of this technique is that with one measurement a user can establish the overall measurement error of the thermocouple measuring instrument being used.

This same method can be used to simulate any temperature by simply adjusting the voltage generator set output and of course any thermocouple type can be tested by the use of different DJT type.

The Isotech Model 880 Double Junction Thermocouple is available in a variety of thermocouple combinations and has been designed with these different applications in mind.

These Model 880 DJT's are used extensively in the range of thermocouple reference systems manufactured by Isotech.

Thermocouple Referencing Systems

These reference systems house a stable, temperature controlled isothermal block in which a large number of DJT's are permanently fitted.

Thermocouples in process requiring accurate referencing can be connected to these systems. The output voltage from each thermocouple can in turn be measured with a microK or reference voltmeter and the DJT error corrected for as shown previously.

For added confidence these systems are fitted with a calibrated Pt100 in order to establish the exact temperature and stability of the isothermal block (RJ) during use therefore further eliminating more sources of error.

TRU Model 937 Thermocouple Reference Unit:



TRURAC Model 847 & ISORAC Model 844:



HOTBOX Model 830:



Help and Advice

If you need low uncertainty measuring systems we can help, contact us for free advice and consultation. We have proven solutions at all levels in temperature metrology, from high accuracy cost effective industrial measurements systems to the lowest uncertainty systems for primary metrology used by the world's leading National Metrology Institutes.

If you have any questions, if you need any advice, if you would like a free consultation then please get in touch